






Guide Din

Steel Mounting DIN Rails

Le Guide Din Kastom sono disponibili in tutti gli standard e in due finiture , Zincate a caldo o con zincatura elettrolitica e passivazione.

Kastom Din Rails are at disposition in all standard range and in 2 different finish treatments , Hot Dip Galvanized and Galvanic Zinc plating and Pssivation.

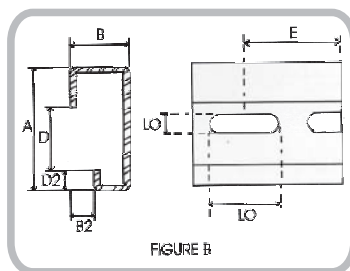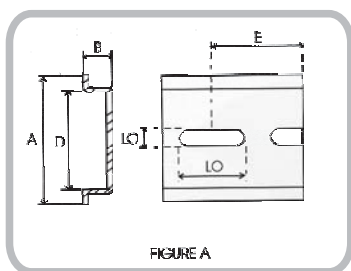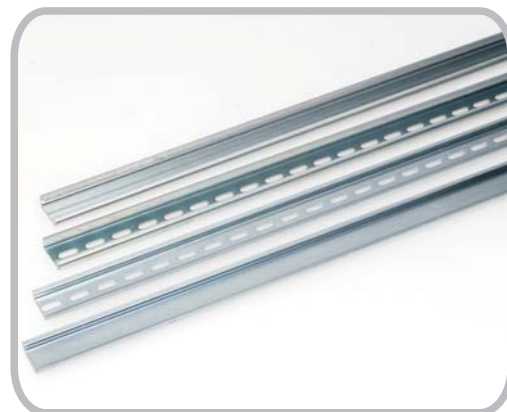

Guide Din Zincate a caldo

Din Rails Hot-Dip Galvanized



Norme EN50035-EN50022-EN50045 DIN46277

ARTICOLO	DESCRIZIONE	Lung. Barra	Imballo
K70035ON	Guida DIN Omega Bassa Non Forata RoHs	2 mt	40 mt
K70035OF	Guida DIN Omega Bassa Forata RoHs	2 mt	40 mt
K70035CN	Guida DIN Omega Alta Non Forata RoHs	2 mt	20 mt
K70035CF	Guida DIN Omega Alta Forata RoHs	2 mt	20 mt
K70032GN	Guida DIN G Non Forata RoHs	2 mt	40 mt
K70032GF	Guida DIN G Forata RoHs	2 mt	40 mt

Caratteristiche Tecniche :
Technical info :

ARTICOLO	Figura	Misure in mm						Kg/mt	Imballo
		A	B (B2)	D (D2)	E	LO	Spessore		
K70035ON	A	35	7,5	27			1	0,35	40 mt
K70035OF	A	35	7,5	27	25	18x6,3	1	0,30	40 mt
K70035CN	A	35	15	27			1,5	0,67	20 mt
K70035CF	A	35	15	27	25	18x6,3	1,5	0,62	20 mt
K70032GN	B	35	15(6)	16,5(5)			1,5	0,73	40 mt
K70032GF	B	35	15(6)	16,5(5)	25	18x5,2	1,5	0,69	40 mt

